

GEEK Surface Round

GK75-R01M



White

Black

Golden

White



Black



GK75-R01M

20° / 360°



125mm
4.92"

74mm
2.91"

Basic Information

Model	GK75-R01M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	20° / 360°
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	50°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GEEK Surface Round IP44

GK75-R44M



White

Black

Golden


White



Black



GK75-R44M



Basic Information

Model	GK75-R44M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	Fixed
IP Rating	IP44
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	35°
UGR	<16
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GEEK Surface Stretchable

GK75-R03M



White

Black

Golden


White



Black



GK75-R03M



Basic Information

Model	GK75-R03M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	50° 360°
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA


Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25°
Shielding Angle	45°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GEEK Surface Snout

GK75-R05M

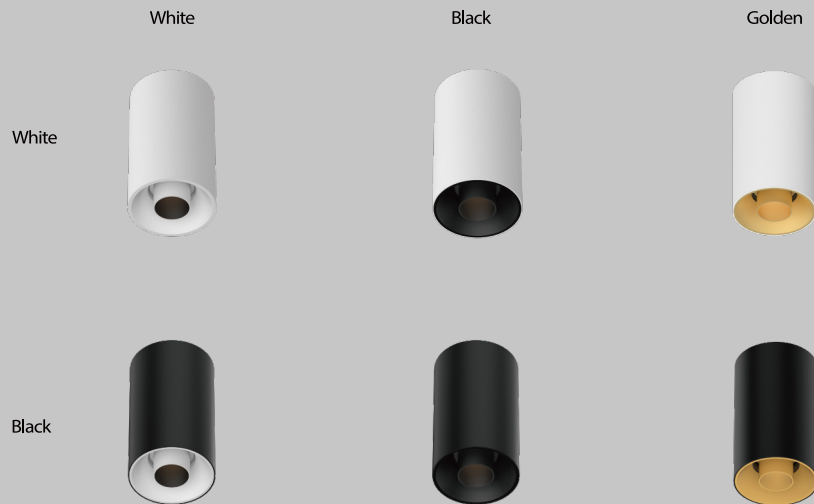

GK75-R05M

20°/ 360°



125mm
4.92"

31mm
1.22"
74mm
2.91"

Basic Information

Model	GK75-R05M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	↓ 20° ↻ 360°
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	▮ 15° ▮ 25° ▮ 35°
Shielding Angle	67°
UGR	< 9
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GEEK Surface Twins

GK75-R08M



White

Black

Golden

White




Black



GK75-R08M

2°25'/360°



Basic Information

Model	GK75-R08M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	2°25° 360°
IP Rating	IP20
Power	Max. 8W
Input Voltage	DC36V
Input Current	Max. 180mA

Optical Parameters

Light Source	LED COB
Lumens	40lm/W
CRI	90Ra
CCT	3000K ● 3500K ● 4000K ○
Beam Angle	15° 25°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI